

# SUN Q

LED 24V - 3W

☐ **Faretto da incasso** - Realizzato in metallo con schermo in policarbonato.


☐ **Recessed spotlight** - Metal structure and screen in polycarbonate.

☐ **Einbaustrahler** - Metall-Gehäuse und Polykarbonat- Abdeckung.




101-111 lm/W PHOTOBIOLOGICAL CLASS 0 **CRI > 80**

CE ENEC IP20 PATENTED

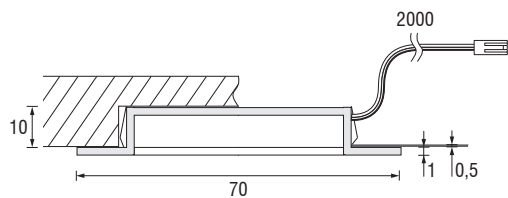


(A) Installazione su legno  
Fitting - Wooden Surfaces  
Montage - Holz

(B) Installazione su lamiera  
Fitting - Metal Surfaces  
Montage - Metall

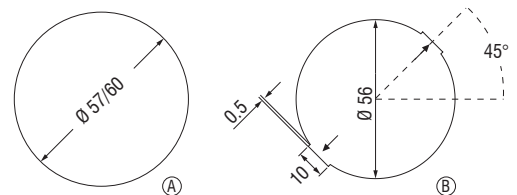

Foro di incasso / Recessed hole / Einbaumaße

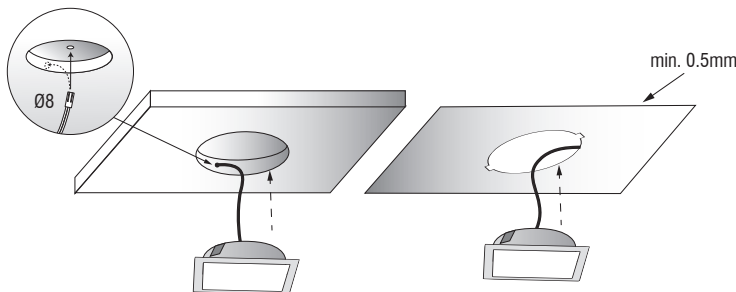

Finitura Finish - Ausführung	3000 K		4000 K		Imballo - Packaging - Verpackung		
	Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC	Pcs	Kg	mm
Acciaio / Steel / Edelstahl	1732090A	A++	1732190A	A++	1	0,085	25 x 75 x 100
Alluminio / Aluminium / Aluminium	1732090S	A++	1732190S	A++	1	0,085	25 x 75 x 100
Cromo / Chrome / Chrom	1732090C	A++	1732190C	A++	1	0,085	25 x 75 x 100
Bronzo / Bronze / Bronze	1732090L	A++	1732190L	A++	1	0,085	25 x 75 x 100
Oro / Gold / Gold	1732090O	A++	1732190O	A++	1	0,085	25 x 75 x 100
Bianco / White / Weiß	1732090B	A++	1732190B	A++	1	0,085	25 x 75 x 100
Nero / Black / Schwarz	1732090N	A++	1732190N	A++	1	0,085	25 x 75 x 100

SUN Q LED 24V - 3W		LUX
		3000K 4000K
mm	110°	
250	Ø 1000	1025 1140
500	Ø 2100	235 275
750	Ø 3150	125 130
1000	Ø 4250	70 75

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)  
Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

Connettore  
Connector / Verbindungsstecker

