





## BAT-Q

BAT Collection

CE    IP52

### Faretto da incasso

Struttura e cornice in alluminio verniciato;  
schermo in policarbonato.

### Sorgente luminosa

LED 24V > 12W | 18W | 31W

### Temperatura colore

4000K

### Finitura

Bianco

### Applicazioni

Controsoffitto / Negozi

### Recessed spotlight

Structure and frame in painted aluminium;  
polycarbonate screen.

### Light source

LED 24V > 12W | 18W | 31W

### Color temperature

4000K

### Finish

White

### Application

False ceiling / Shops

### Einbaustrahler

Struktur und Rahmen aus lackiertem Aluminium;  
Abdeckung aus Polycarbonat.

### Lichtquelle

LED 24V > 12W | 18W | 31W

### Lichtfarbe



4000K

### Ausführung

Weiß

### Anwendungen

Abgehängte Decken / Geschäfte

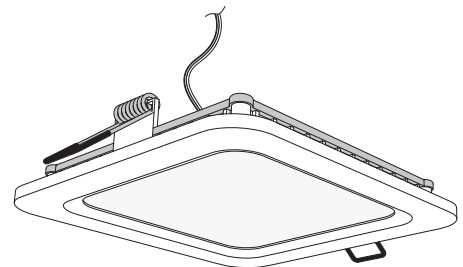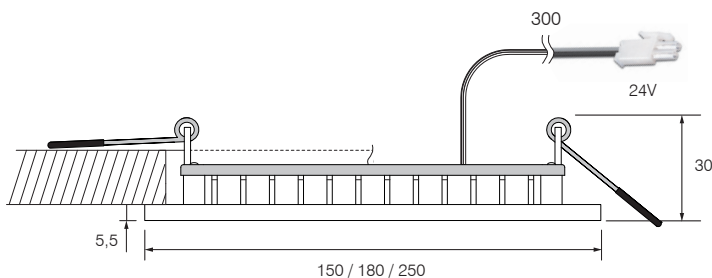

## BAT-Q

12W / 18W / 31W



12W



18W




31W

### LED 12W

V IN	mm	Foro di incasso Recessed hole / Einbaumaße	4000 K		
			Lumen	COD.	EEC
24V	150 x 150	125 x 125	727 lm	1742000NB	A


60 lm/W PHOTOBIOLOGICAL CLASS 0 CRI > 80



### LED 18W

V IN	mm	Foro di incasso Recessed hole / Einbaumaße	4000 K		
			Lumen	COD.	EEC
24V	180 x 180	160 x 160	1134 lm	1742005NB	A

63 lm/W PHOTOBIOLOGICAL CLASS 0 CRI > 80



### LED 31W

V IN	mm	Foro di incasso Recessed hole / Einbaumaße	4000 K		
			Lumen	COD.	EEC
24V	250 x 250	225 x 225	2136 lm	1742010NB	A

68 lm/W PHOTOBIOLOGICAL CLASS 0 CRI > 80

