





BAT-R

BAT Collection

CE IP52

Faretto da incasso

Struttura e cornice in alluminio verniciato; schermo in policarbonato.

Sorgente luminosa

LED 24V > 11W | 16W | 28W

Temperatura colore

4000K

Finitura

Bianco

Applicazioni

Controsoffitto / Negozi

Recessed spotlight

Structure and frame in painted aluminium; polycarbonate screen.

Light source

LED 24V > 11W | 16W | 28W

Color temperature

4000K

Finish

White

Application

False ceiling / Shops

Einbaustrahler

Struktur und Rahmen aus lackiertem Aluminium; Abdeckung aus Polykarbonat.

Lichtquelle

LED 24V > 11W | 16W | 28W

Lichtfarbe



4000K

Ausführung

Weiß

Anwendungen

Abgehängte Decken / Geschäfte

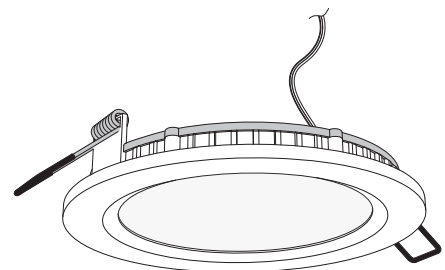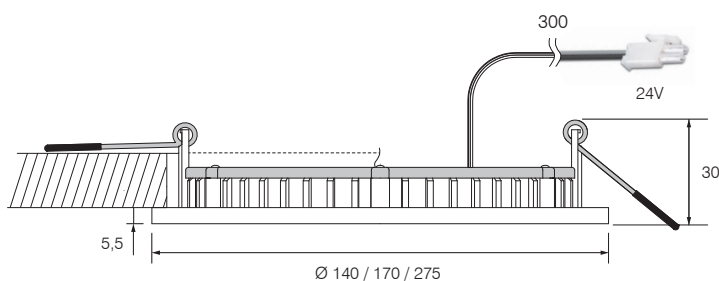

BAT-R

11W / 16W / 28W



11W



16W




28W

LED 11W

V IN	Ø	Foro di incasso Recessed hole / Einbaumaße	4000 K		
			Lumen	COD.	EEC
24V	Ø 140	Ø 120	695 lm	1741000NB	A


63 lm/W PHOTOBIOLOGICAL CLASS 0 CRI > 80



LED 16W

V IN	Ø	Foro di incasso Recessed hole / Einbaumaße	4000 K		
			Lumen	COD.	EEC
24V	Ø 170	Ø 145	1066 lm	1741005NB	A

66 lm/W PHOTOBIOLOGICAL CLASS 0 CRI > 80



LED 28W

V IN	Ø	Foro di incasso Recessed hole / Einbaumaße	4000 K		
			Lumen	COD.	EEC
24V	Ø 275	Ø 250	2167 lm	1741010NB	A

77 lm/W PHOTOBIOLOGICAL CLASS 0 CRI > 80

