





# KOS

## LED 24V - 14,4W/m


- IT** **Lampada senza interruttore** - Lampada regolabile nell'apertura del fascio di luce. Profilo in alluminio con veletta orientabile per direzionare il fascio di luce.
- EN** **Lamp without switch** - Light adjustable at the light beam opening. Aluminium profile with adjustable glare shield for the light beam orientation.
- DE** **Leuchte ohne Schalter** - Lampe mit manuell verstellbarem Blendschutz zur gezielten Lichtausrichtung. Alu- Profil mit manuell verstellbarem Blendschutz zur gezielten Lichtausrichtung.

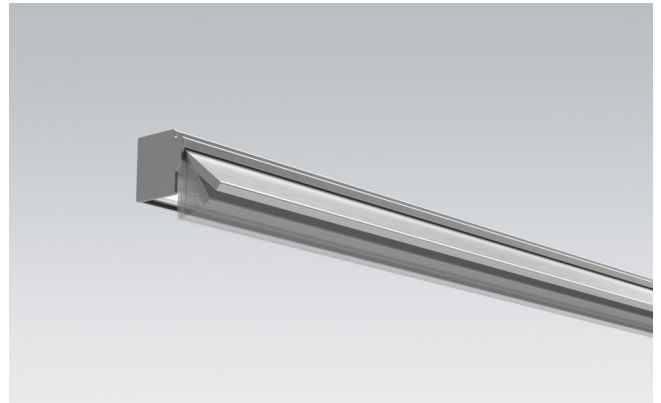

120-125 lm/W PHOTOBIOLOGICAL CLASS 0 CRI ≥80

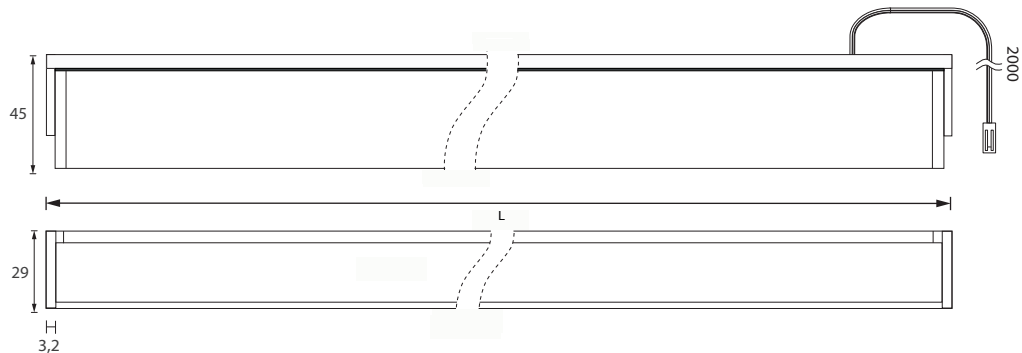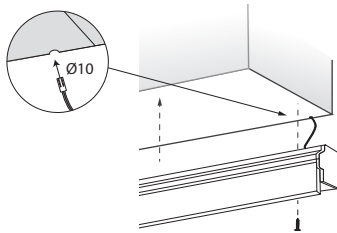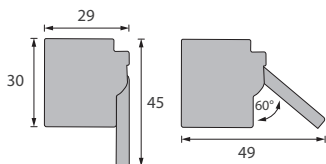

Finitura Finish - Ausführung	L	W	3000K		4000K	
			Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC
Alluminio / Aluminium / Aluminium	450	6,24W	1950450W3B14	A++	1950450N3B14	A++
	600	8,16W	1950600W3B14	A++	1950600N3B14	A++
	900	12,48W	1950900W3B14	A++	1950900N3B14	A++
	1200	16,80W	1951200W3B14	A++	1951200N3B14	A++
	1500	21,12W	1951500W3B14	A++	1951500N3B14	A++
	1800	25,44W	1951800W3B14	A++	1951800N3B14	A++
Bronzo Titanio / Titanium Bronze / Titan-Bronze	450	6,24W	1950450W3B14BT	A++	1950450N3B14BT	A++
	600	8,16W	1950600W3B14BT	A++	1950600N3B14BT	A++
	900	12,48W	1950900W3B14BT	A++	1950900N3B14BT	A++
	1200	16,80W	1951200W3B14BT	A++	1951200N3B14BT	A++
	1500	21,12W	1951500W3B14BT	A++	1951500N3B14BT	A++
	1800	25,44W	1951800W3B14BT	A++	1951800N3B14BT	A++
Nero / Black / Schwarz	450	6,24W	1950450W3B14N	A++	1950450N3B14N	A++
	600	8,16W	1950600W3B14N	A++	1950600N3B14N	A++
	900	12,48W	1950900W3B14N	A++	1950900N3B14N	A++
	1200	16,80W	1951200W3B14N	A++	1951200N3B14N	A++
	1500	21,12W	1951500W3B14N	A++	1951500N3B14N	A++
	1800	25,44W	1951800W3B14N	A++	1951800N3B14N	A++

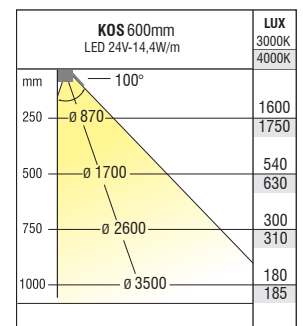

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)  
Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

