







Specifications

-  bottom mount
-  18.0 mm / 0.71 in.
-  dynamic up to 70 kg / 154 lbs.
-  solid synthetic rollers
-  stainless steel 1.4509 / 441
-  -25 °C to +80 °C
-13 °F to +176 °F


Characteristics

- high lateral stability
- cabinet and drawer profile with screw holes
- ideal running characteristic and smoothness of running through integrated progressive action
- integrated safety clip
- dual-sided captive profile
- synthetic stop
- self-closing
- available as heat-resistant version up to +110 °C (+230 °F)
- Easy Close Device (ECD) can be ordered optionally

Mounting Type

- cabinet and drawer profile with screw holes

Dimensions

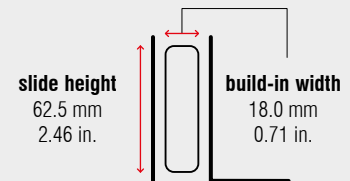

Length		Extension		Weight		Item No.	Item No.
				per set		PU 1	PU 2
mm	inch	mm	inch	kg	lbs.		
300	11.81	285	11.22	1.45	3.19	▶ 70480	▶ 70480GV
350	13.78	335	13.19	1.62	3.57	▶ 70481	▶ 70481GV
400	15.75	385	15.16	1.81	4.00	▶ 70482	▶ 70482GV
450	17.72	435	17.13	2.08	4.59	▶ 70483	▶ 70483GV
500	19.69	485	19.09	2.33	5.13	▶ 70484	▶ 70484GV
550	21.65	535	21.06	2.57	5.66	▶ 70485	▶ 70485GV
600	23.62	585	23.03	2.82	6.22	▶ 70486	▶ 70486GV
650	25.59	635	25.00	3.08	6.79	▶ 70487	▶ 70487GV
700	27.56	685	26.97	3.33	7.34	▶ 70488	▶ 70488GV
750	29.53	735	28.94	3.59	7.91	▶ 70489	▶ 70489GV

Packing Unit

PU 1 – Sets assembled per Box, all Lengths: 5

PU 2 – 50 Sets, all 6 profiles individually packaged, 10 boxes

(4 x 25 cabinet profiles LEFT/RIGHT, 4 x 25 middle profiles LEFT/RIGHT, 2 x 50 drawer profiles LEFT/RIGHT)

▶ in stock